CNX53175-3

- 175 kVAr, 480 V, 60 Hz, 3-phase
- 210 amps

APPLICATIONS

- Branch panel
- Main service entrance

STANDARD FEATURES

- UL & C-UL listed, CE
- 2-year warranty
- 3-line fusing with blown fuse indication
- Discharge resistors per NEC requirements
- Assembled in the USA

CAPACITOR CELLS

- 528 Continuous voltage rating:
- Continuous current rating: 165% of nominal
- Ambient temperature rating: 140° F
- 130,000 hours rated life
- 2-year warranty
- Self-contained, 3-phase, delta-connected
- Industrial grade dry-type construction
- Losses of less than ½ watt per kVAr
- Self-healing metallized polypropylene dielectric film
- 3-phase overpressure disconnector
- Hermetically-sealed aluminum case
- Finger-safe, maintenance free terminals

FUSES

- Fast-acting, current-limiting, with 200,000 ampere interrupting capacity

FIELD WIRING TERMINATION

- Mechanical connections are provided for all field wiring termination points
- Refer to product manual for incoming conductor information

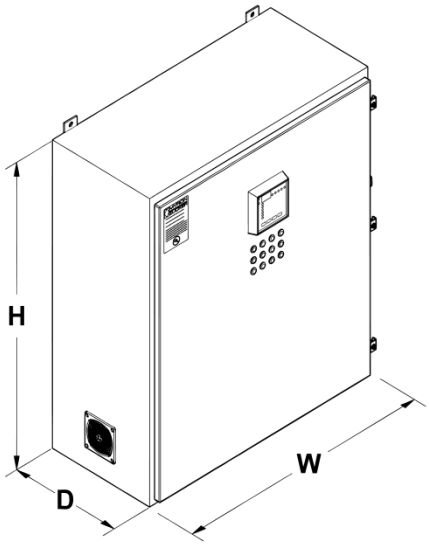

ENCLOSURE

- Dimensions: 36 in H x 24 in W x 16 in D
- Weight: 170 lb
- Built to NEMA 12 specifications for indoor use
- Wall-mounted with pad-lockable hinged door

OPTIONS

- Circuit breaker or disconnect switch
- Other enclosure ratings available
- Other voltages and frequencies available