

RECTANGULAR CAPACITOR CELLS (Model CAP)


- ♦ 240, 480, 600 V
- ♦ 3-phase
- ♦ 60 Hz (may also be derated to 50 Hz)

PERFORMANCE CHARACTERISTICS


- ♦ Continuous ambient temperature rating:
 - ♦ -40° F to +115° F
- ♦ Continuous current rating: 135 % x I_{Nom}
- ♦ Continuous voltage rating: 110% of rated voltage
- ♦ Tolerance (μ F and kVAr): -0 % / +15 %

CONSTRUCTION FEATURES

- ♦ Hermetically-sealed steel case
- ♦ Dry type capacitor cell
- ♦ Constructed with segmented, self-healing metalized polypropylene film
- ♦ Internal over-pressure device that disconnects all three phases in the event of internal overpressure
- ♦ 12-24 NC-2A threaded studs

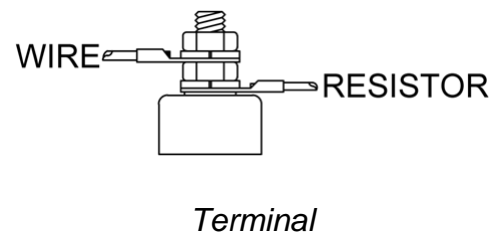

MYRON ZUCKER ♦ ♦ ♦ RECTANGULAR CAPACITOR CELLS

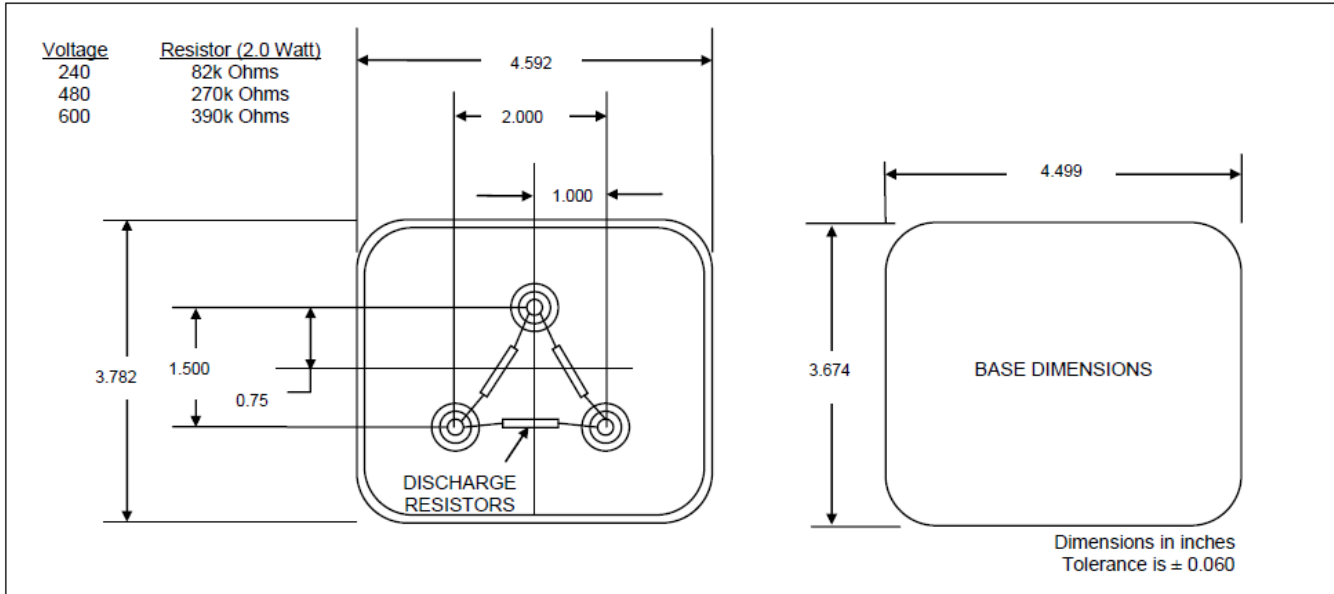

	240 V		480 V		600 V	
kVAr	Part Number	H (in)	Part Number	H (in)	Part Number	H (in)
1	CAP4004	4	CAP4001	4		
1.5	CAP4006	4	CAP4001X	4		
2	CAP4007X	4	CAP4002	4	CAP6002	4
2.5	CAP4010	5	CAP4002X	4	CAP6002X	4
3	CAP4012X	5.5	CAP4003	4	CAP6003	4
4	CAP4016S	6	CAP4004	4	CAP6004	4
5	CAP2005	5	CAP4005	4	CAP6005	4
6	CAP2006	5	CAP4006	4	CAP6006	4
7.5	CAP2007X	7.5	CAP4007X	4	CAP6007X	4
10	CAP2010	7	CAP4010	5	CAP6010	5
12.5			CAP4012X	5.5	CAP6012X	5.5
15			CAP4015	6	CAP6015	5.5
16.7			CAP4016S	6	CAP6016S	6
17.5			CAP4017X	7	CAP6017X	6
20			CAP4020	7	CAP6020	9